
### **4 SEATER DINING TABLE**

Stock number: 3049-4

Thank you for purchasing this product. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

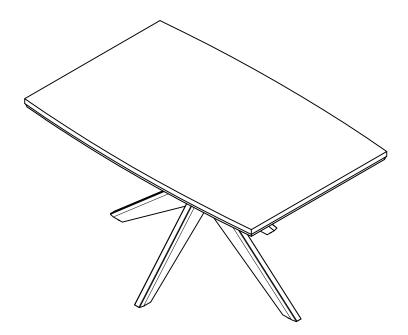


### **Pre-assembly preparation**

Please ensure instructions are read in full before attempting to assemble this product.

### **Necessary Tools:**





Please check the pack contents before attempting to assemble this product. A full checklist of components is given in this leaflet. If any components are missing, please contact the retailer from whom you bought this product.

This product takes approximately 30 MINUTES to assemble with 2 PEOPLE.


All assembly should be performed on a flat, stable, clean and soft surface.

This product is **HEAVY**, it should be assembled as near as possible to the point of use. **TAKE CARE WHEN LIFTING** to avoid personal injury and (or) damage to the product.

The fitting pack contains SMALL ITEMS which should be KEPT AWAY FROM YOUNG CHILDREN.

**IMPORTANT:** Retain these instructions for future reference.

Page: 1

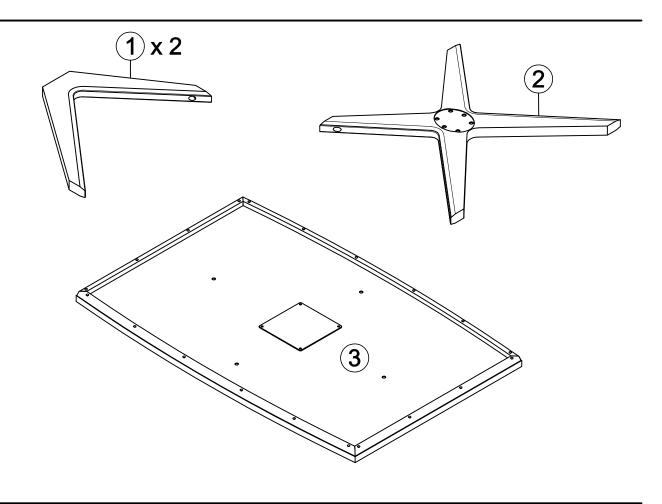

# Fittings and parts checklist

Item	Description	Qty.	ltem	Description	Qty.
1	Leg A	x 2	3	Top frame	x 1
2	Leg B	x 1			
Α	Metal plate	x 2	F	Flat washer Ø8 x Ø17 x 1.6mm	x 4
В	Countersunk bolt M8 x 30mm	x 4	G	Lock washer Ø8.4 x 2mm	x 4
С	Large allen key M5 x 30 x 110mm	x 1	Н	Small allen key M4 x 30 x 110mm	x 1
D	Countersunk bolt M8 x 20mm	x 12	K	Felt 6x20x72mm	x 4
E	Hex head bolt M8 x 50mm	× 4			

Page: 2

## **Step By Step Assembly Instructions**

# Step ①



- 1.1: Lay all parts on a flat, stable, clean and soft surface.
- 1.2 : Attach 2x metal plates (A) onto legs A (1) using 4x countersunk bolts (B) as shown. Ensure the pre-drilled holes on legs A (1) are aligned correctly to the holes on metal plates (A). Use an allen key (C) to turn fittings (B) clockwise to fix.

#### **Fitting**






 $B \times 4$ 



C x 1

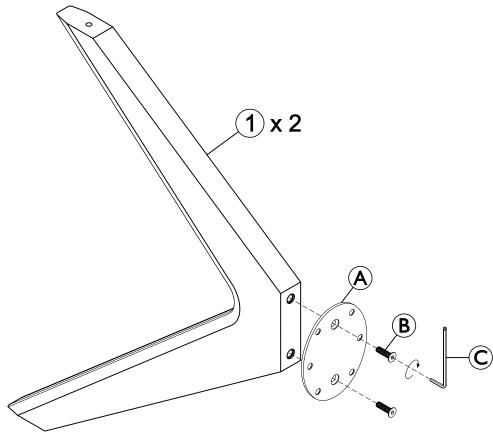

**Step 1.2** 

## **Step By Step Assembly Instructions**

# Step 2




Attach legs A (1) onto leg B (2) using 12x countersunk bolts (D) as shown. Ensure the pre-drilled holes on legs A (1) are aligned correctly to the holes on leg B (2). Use an allen key (C) to turn fittings (D) clockwise to fix. Do not tightening.

**Fitting** 



D x 12



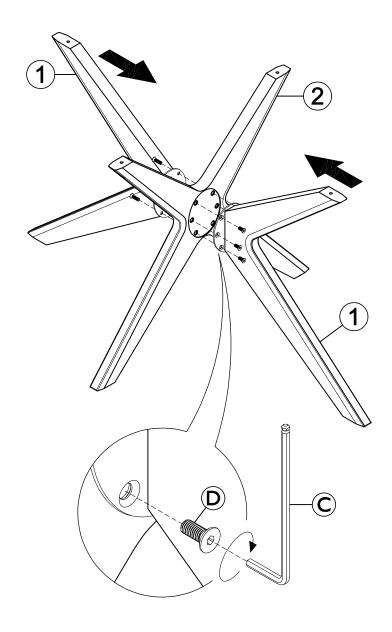

### **Step By Step Assembly Instructions**

## Step (3)

**Fitting** 

- 3.1: Attach the structure assembled in Step 2 onto table top (3) as shown. Ensure the pre-drilled holes on legs A (1), leg B (2) are aligned correctly to the holes on table top (3) before attaching.
- 3.2 : Secure legs A (1), leg B (2) to table top (3) using 4x hex head bolts (E), 4x flat washers (F), 4x lock washers (G) as shown. Use an allen key (H) to turn fittings (E) clockwise to fix.

Note: Position all bolts (D) on all metal legs before full tightening.

- 3.3 : Re-tightening.
- 3.4 : Remove the plastic from 4x felts (K) and stick felts (K) onto under legs A (1) & leg B (2) as shown.

